


| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|----------|-------------|-----------------------|------|
| 1 | 172215 | 5000L VERTICAL TANK | 1 |
| 2 | 135362 | Ø 620 SCREW LID & RIM | 1 |

| DESIGN DATA | |
|---|---------------------------------|
| DESIGN PRESSURE: ATMOSPHERIC | MAXIMUM CAPACITY (LTRS): 5900 |
| DESIGN TEMPERATURE: 40°C | WORKING CAPACITY (LTRS): - |
| WORKING PRESSURE: ATMOSPHERIC | APPROX. WEIGHT FULL (KGS): 6020 |
| WORKING TEMPERATURE: 40°C | APPROX. WEIGHT EMPTY (KGS): 120 |
| MOULDED LIFTING LUGS: 4 - 0°, 90°, 180° & 270° | |
| METHOD OF SUPPORT: FIRM, FLAT, FULLY SUPPORTING BASE OF CONCRETE OR OTHER SUITABLE MATEREAL | |


| MATERIAL DATA |
|---|
| MATERIALS OF CONSTRUCTION: MATRIX REVOLVE N-307. REVOLVE IS A HIGH DENSITY (0.939 g/cm3), LOW MELT (3.5 g/ 10 min) HEXENE POLYETHYLENE GRADE FOR ROTOMOULDING. THE GRADE IS FULLY PROTECTED AGAINST THERMAL AND LIGHT DEGRADATION: N-307 IS UV10 STABILISED. |

| INSPECTION AND TESTING |
|---|
| WORKS TEST: ALL TANKS ARE THICKNESS TESTED BY ULTRASOUND AFTER DEMOULD IN ADDITION AIR SUPPORTED LEAK TEST ARE CARRIED OUT ON FLANGE LINES. |


NOTE SECTION

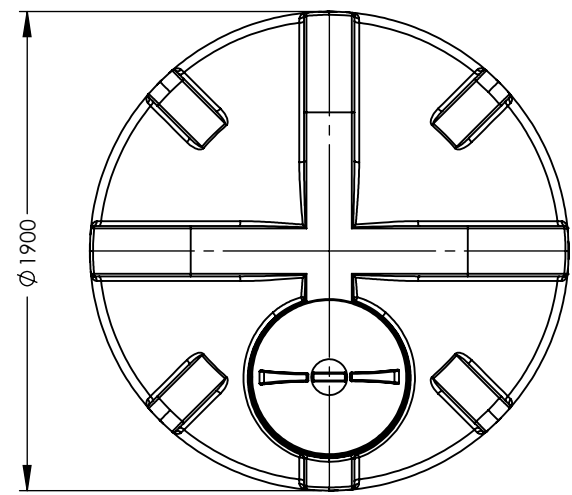

PLAN VIEW

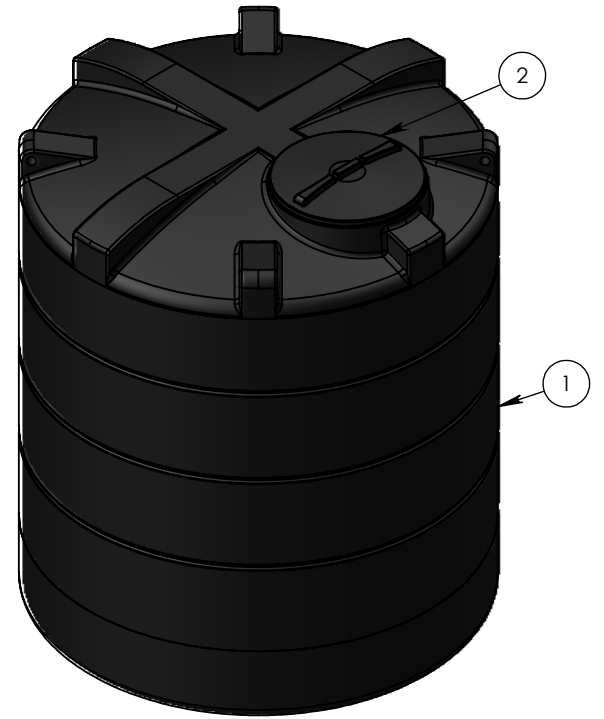

LEFT ISO VIEW

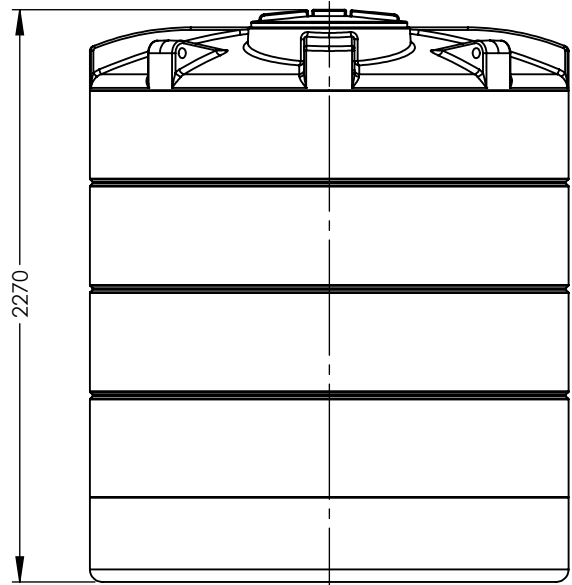

FRONT VIEW

| | NAME | SIGNATURE | DATE |
|---------|------|-----------|------------|
| DRAWN | LC | L.Crane | 25/06/2021 |
| CHECKED | | | |

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH: MDPE
TOLERANCES: ±3%

3RD ANGLE PROJECTION

DO NOT SCALE DRAWING REVISION: -

ENDURAMAXX®
FLUID MANAGEMENT INNOVATION

DWG TITLE:
5000L VERTICAL TANK

DWG NO: 172215-5000L-VERTICAL A3

SCALE: 1:30 SHEET 1 OF 1